


COMPANY PROFILE

Ruian DeGuan Machinery Co., Ltd. is located in Ruian City, which is famous for the "China Machinery City". We dedicates to the development and manufacturing of post-label equipment. It is a enterprise who integrates product design, manufacturing, sales, services, solutions and insisting on quality is the survival law. In the face of the ever-changing label printing and post-printing market, our technical engineers actively absorbs the technical essence of similar products from domestic and abroad. We successful developed a leading level of fully automatic turret rewinding machine, which has its own intellectual property rights to fill the market gap. We always stand at the end of customer requirement side, aiming and meeting the special requirements of different processes and saving human resources and energy costs.

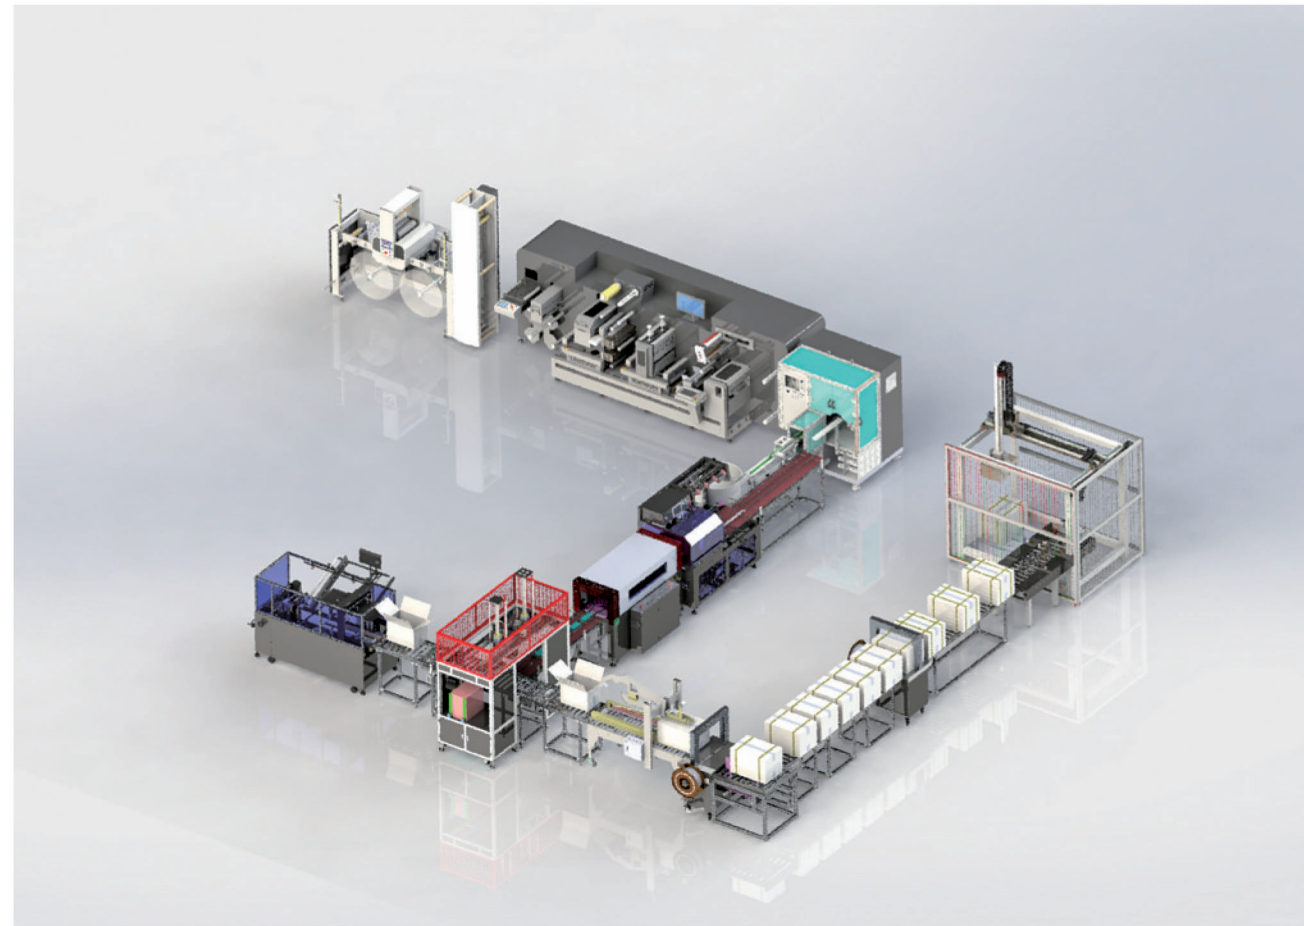

DEG-T330-A 转塔式复卷机

Turret Rewinder

转塔式复卷机配备有自动穿纸管机构, 可实现不停机复卷, 可连线轮转模切、分切机、柔版印刷机等设备。复卷机配备有1英寸1.5英寸3英寸快拆式气胀轴终生免为维护! 复卷机在更换不同收卷轴尺寸大小时无需人工机械调节, 系统会根据收卷轴大小自动调节, 减少人工劳动力, 实现智能化生产, 复卷机复卷产品可实现与纸管的轻松脱离, 不会给终端客户造成打印机卡带, 打印头损坏等优势。

- 1 纸管振动盘
Paper tube vibrating device
- 2 自动上纸管装置
Automatic paper loading device
- 3 PLC触摸屏系统
PLC touch screen system
- 4 裁切机构
Cutting mechanism
- 5 涂胶装置
Gumming device
- 6 收卷机构
Rewinding mechanism
- 7 卸料装置
Unloading device
- 8 气胀轴存放点
Air shaft storage space



主要技术参数 Main technical parameters:

设备型号	Model	DEG-T330-A	DEG-T450-A	DEG-T570-A
最大收卷直径	Max. rewinding diameter	350mm	350mm	350mm
最大进纸宽度	Max. feeding width	330mm	450mm	570mm
最高机械速度	Max. mechanical speed	60-120m/min	60-120m/min	60-120m/min
最小收卷宽度	Min. rewinding diameter	50mm	80mm	100mm
整机功率	Total Power	8kw	10kw	12kw
设备电源	Power supply	3PH+N+PE	3PH+N+PE	3PH+N+PE
外形尺寸	Overall dimensions	1450×3000×1700mm	1800×2200×1800mm	2000×2200×1900mm
设备重量	Weight	Around 2.0T	Around 2.1T	Around 2.2T
气压要求	Pressure	0.8MPa	0.8MPa	0.8MPa


The turret rewinder is equipped with automatic paper core loading system, which can do non-stop rewinding with rotary die cutting machine, flexo printing machine and other equipment. With 1 inch, 1.5 inch, 3-inch quick-disassembling air expansion shaft for maintenance. The machine can automatically adjust the when replaces different shaft sizes, which reduce labor cost to achieve intelligent production. The finished products can be easy separated from the paper tube, then will not stuck the printer or break the printing head to the end user.

DEG-W330-A

转塔式无胶复卷机

Rotating Tower Rewinder

无胶转塔式复卷机配备有自动穿纸管机构, 占地面积小, 节能无需加热涂胶, 标准自带尾部在线打印贴标, 可自定义打印内容, 可实现不停机复卷, 可连线(轮转模切、高速平压平模切、分切机、柔版印刷机等设备)。复卷机配备有1英寸1.5英寸3英寸快拆式气胀轴终生免为维护! 减少人工劳动力实现智能化生产, 复卷机复卷产品可实现与纸管的轻松脱离, 不会给终端客户造成打印机卡带, 打印头损坏等优势。

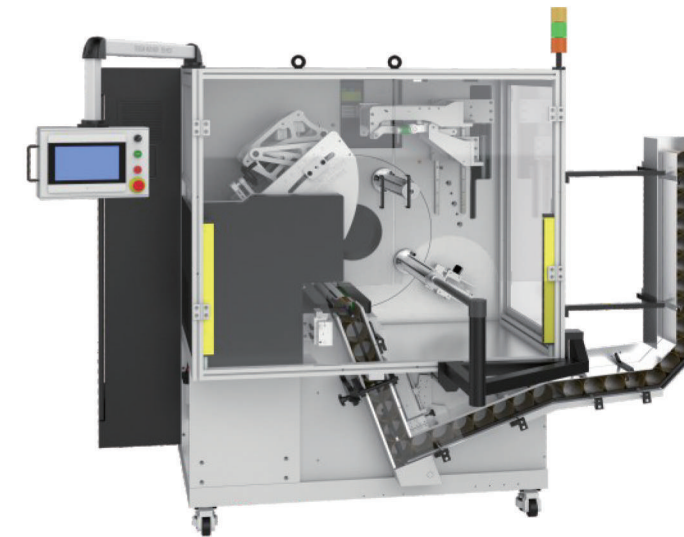

主要技术参数 Main technical parameters:

设备型号	Model	DEG-W330-A	DEG-W450-A	DEG-W520-A
最大收卷直径	Max. rewinding diameter	350mm	350mm	350mm
最大进纸宽度	Max. feeding width	330mm	450mm	520mm
最高机械速度	Max. mechanical speed	60-120m/min	60-120m/min	60-120m/min
最小收卷宽度	Min. rewinding diameter	50mm	80mm	100mm
整机功率	Total Power	8kw	10kw	12kw
设备电源	Power supply	3PH+N+PE	3PH+N+PE	3PH+N+PE
外形尺寸	Overall dimensions	1450×3000×1700mm	1450×3200×1700mm	1450×3500×1700mm
设备重量	Weight	Around 2.0T	Around 2.1T	Around 2.2T
气压要求	Pressure	0.8MPa	0.8MPa	0.8MPa

The glueless turret rewinder is equipped with automatic paper core loading system, small footprint, energy saving, no need for heating glue, standard online tail labeling, can be customized printing content, can be connected with rotary/flat die cutting machine, slitting machine, flexo printing machine, and other equipment. With 1 inch, 1.5 inch, 3-inch quick-disassembling air expansion shaft for maintenance. The machine can automatically adjust the when replaces different shaft sizes, which reduce labor cost to achieve intelligent production. The finished products can be easy separated from the paper tube, then will not stuck the printer or break the printing head to the end user.



Professional Label
Printing Equipment Manufacturer
专业的标签印后设备制造商



www.cn-deg.com

DEGUAN MACHINERY

瑞安德冠机械有限公司